



Pull out shelves

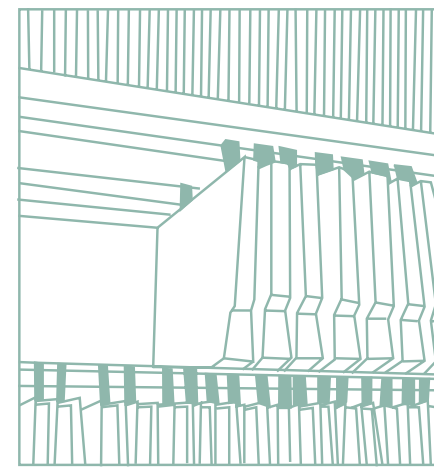

Duplex shelves

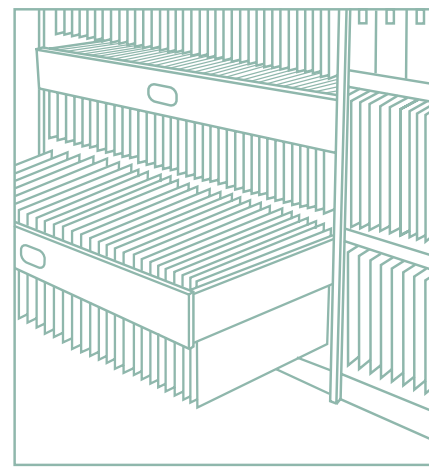

Pull out cradles



Pull out drawers



Book supports



Lockers


The locking system on the Standard Pirouette enables the unit to be locked in both the closed, and the open position. Half of the stored material is fully accessible to staff when in the locked open position.

The remaining 50% of stored material is available only to supervisory staff and accessed with the use of the key.

Each Pirouette unit is a free standing entity. Should there be a need to remove a unit from the centre of a run, then this can be quickly executed by the removal of a series of bolts and the extraction of the unit. Due to the independent construction, the remaining units can be immediately accessed in the normal manner and end panels fitted as required.

The range of accessories for Pirouette includes: lockers, pull out reference shelves, suspended lateral file shelves, dividers, pull out file cradles, lockable drawer systems, lockable compartments and sortation trays.


## the rackline range



Cabinets



Pirouette

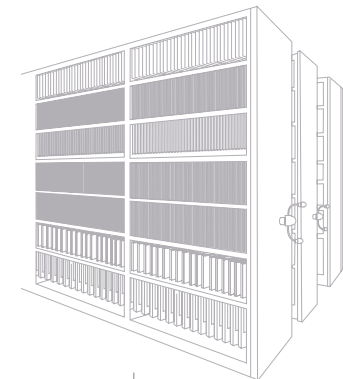

Mobile

Fastrak • Multitrak • Monotrak




Powertrak



Static

Profile • Proform

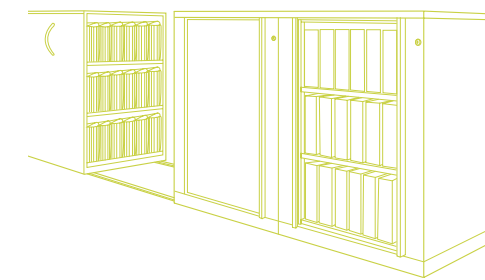

Low Level

making  
space  
work for you



For a free no obligation site survey, layout drawings and quotation, contact the team today.


t: 01782 770144  
e: [now@rackline.co.uk](mailto:now@rackline.co.uk)  
[www.rackline.co.uk](http://www.rackline.co.uk)

Rackline Limited, Oaktree Lane, Talke, Newcastle-Under-Lyme, Staffordshire. ST7 1RX

R A C K L I N E

# pirouette

fast access  
rotary storage centre  
making space work for you

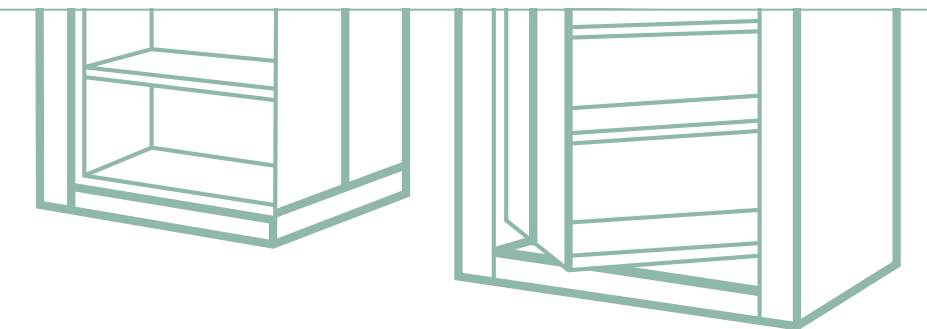

technical specification

R A C K L I N E

## The Pirouette Rotary Storage Unit is British made and designed.




The Pirouette's all steel construction is designed to rigorous standards of quality and is provided with a life time guarantee on the rotation unit.

Pirouette can be rotated in a clockwise or anticlockwise direction by grasping the full height hand hold and pulling the unit towards the operator. This feature eliminates the reluctance felt by operators when asked to push units open into a perceived hand trap. The spring loaded indent roller means that a positive location is made at each of the 90° stations.


The indent engages a recess automatically and does not have to surmount an indent bridge, as with some systems, thereby making the rest positions both direct and positive. This indent pressure is adjustable, during or after installation. This is an important feature as different bay loads need different pressure at the indent.

The systems can be supplied in a wide range of sizes, and due to the design of the system, extension bays can be added to initial bays on either side and should units need to be rearranged and relocated. The Pirouette unit can easily be converted to an individual bay by the addition of end panels

The interior of the storage centre incorporates a full height backsheet, together with the specified quantity of storage levels. Each shelf is vertically adjustable at a pitch of 12.5 mm to give infinite in accommodating any media to be stored. Shelf adjustment is extremely simple and quick as the shelves rest on independent clips which are contained within the flange of the shelf unit. No cantilever arms are used, nor are any screws used in locating the shelves. Operators simply lift the shelf, re-position the clips to the new location and drop in the shelf. This task can be carried out by any member of staff. No tools are needed.

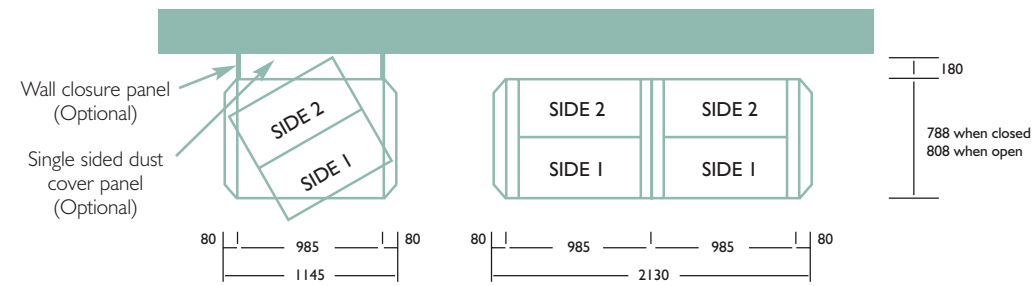


Layout for single sided run against a wall

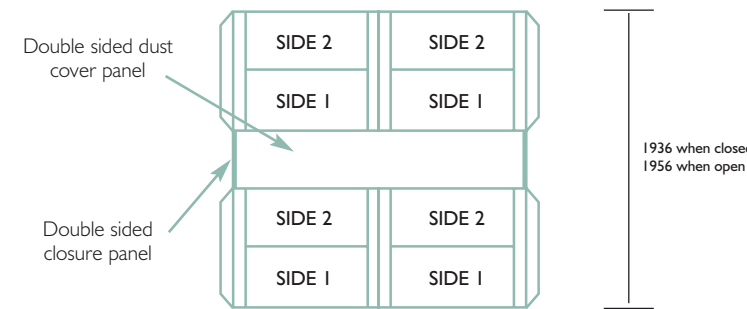

Notes:  
Each shelf is 760mm wide x 400mm deep x 20mm high.  
50mm clear headroom must be available above unit to enable installation.

Layout for double sided run

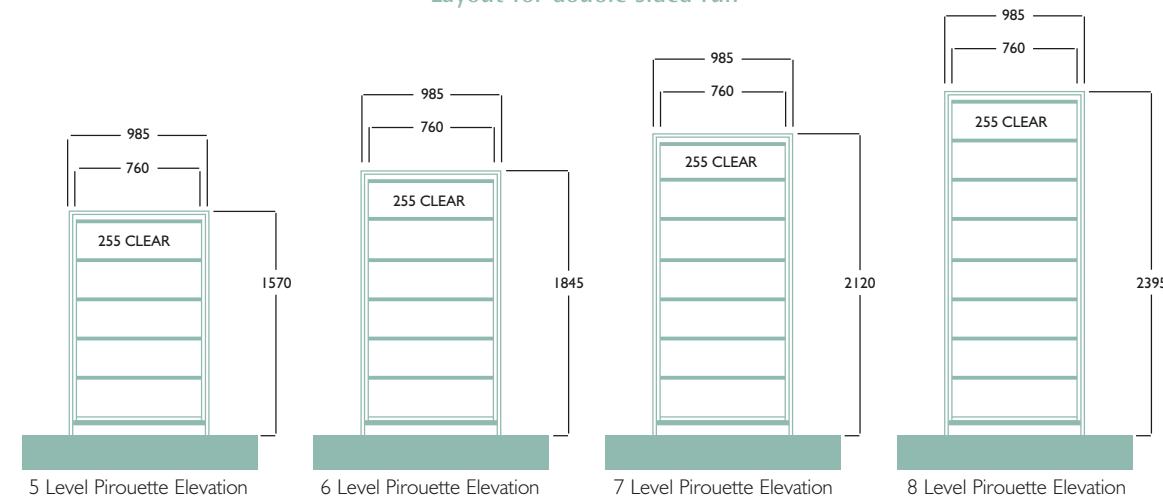

Unit Type	Unit Width	Unit Depth	Unit Height
Initial	1145mm	790mm	8 level : 2414mm
Extension	985mm	790mm	7 level : 2138mm
			6 level : 1864mm
			5 level : 1589mm
			4 level : 1314mm

Note: Units must be positioned 180mm from walls. Pirouette is manufactured in Britain to ISO 9002 using the latest production and finishing technology.



The Pirouette units in this comparison are 2395mm tall with 8 storage levels. The Profile bays used in this comparison are 2175mm tall with 7 storage levels.

No. of Four Drawer Filing Cabinets	Floor Space Required	Storage Capacity	Alternative	Number of Pirouettes	Floor Space Required	Storage Alternative Capacity
10	8.0 sq m	22 lin m	Pirouette	2	3.82 sq m	24.32 lin m
20	16.0 sq m	44 lin m		4	7.64 sq m	48.64 lin m
30	24.0 sq m	66 lin m		6	11.46 sq m	72.96 lin m
40	32.0 sq m	88 lin m		8	15.28 sq m	97.28 lin m
50	40.0 sq m	110 lin m		10	19.1 sq m	121.6 lin m
60	48.0 sq m	132 lin m		11	21.01 sq m	133.76 lin m
70	56.0 sq m	154 lin m		13	24.83 sq m	158.08 lin m
80	64.0 sq m	176 lin m		15	28.65 sq m	182.4 lin m
90	72.0 sq m	198 lin m		17	32.47 sq m	206.72 lin m
100	80.0 sq m	220 lin m		19	36.29 sq m	231.04 lin m

No. of Roller Front Cupboards	Floor Space Required	Storage Capacity	Alternative	Number of Profile Bays	Floor Space Required	Storage Capacity
10	14.9 sq m	45 lin m	Profile	8	11.92 sq m	50.4 lin m
20	29.8 sq m	90 lin m		15	22.35 sq m	94.5 lin m
30	44.7 sq m	135 lin m		22	32.78 sq m	138.6 lin m
40	59.6 sq m	180 lin m		29	43.21 sq m	182.7 lin m
50	74.5 sq m	225 lin m		36	53.64 sq m	226.8 lin m
60	89.4 sq m	270 lin m		43	64.07 sq m	270.9 lin m
70	104.3 sq m	315 lin m		50	74.5 sq m	315.0 lin m
80	119.2 sq m	360 lin m		58	86.42 sq m	365.4 lin m
90	134.1 sq m	405 lin m		65	96.85 sq m	409.5 lin m
100	149 sq m	450 lin m		72	107.28 sq m	453.6 lin m